


PX 1130


PX 113



		T ₂ (Nm)						n _{1max} (min ⁻¹)	T _{2max} (Nm)	P _t (kW)
i	n ₂ x h									
	10000	25000	50000	100000	500000	1000000				
1131	3.55	1940	1810	1810	1810	1810	1670	2800	3400	12
	4.28	2200	2050	1620	1520	1520	1310	2800	3400	12
	5.60	1450	1320	1190	1190	1190	1120	2800	2420	12
	6.75	1210	1100	1000	1000	1000	970	2800	2000	12
	8.67	890	810	675	675	675	675	2800	1300	12
1132	12.6	1940	1810	1810	1810	1810	1670	2800	3400	8
	15.2	1940	1810	1810	1810	1810	1670	2800	3400	8
	19.9	1940	1810	1810	1810	1810	1670	2800	3400	8
	23.9	2200	2050	1620	1520	1520	1310	2800	3400	8
	28.9	2200	2050	1620	1520	1520	1310	2800	3400	8
	31.4	1450	1320	1190	1190	1190	1120	2800	2420	8
	37.8	1450	1320	1190	1190	1190	1120	2800	2420	8
	45.5	1210	1100	1000	1000	1000	970	2800	2000	8
58.5	1210	1100	1000	1000	1000	970	2800	2000	8	
1133	54.1	1940	1810	1810	1810	1810	1670	2800	3400	6
	65.3	1940	1810	1810	1810	1810	1670	2800	3400	6
	70.7	1940	1810	1810	1810	1810	1670	2800	3400	6
	78.7	1940	1810	1810	1810	1810	1670	2800	3400	6
	85.3	1940	1810	1810	1810	1810	1670	2800	3400	6
	102.8	1940	1810	1810	1810	1810	1670	2800	3400	6
	111.5	1940	1810	1810	1810	1810	1670	2800	3400	6
	134.3	1940	1810	1810	1810	1810	1670	2800	3400	6
	161.9	1940	1810	1810	1810	1810	1670	2800	3400	6
	172.5	1940	1810	1810	1810	1810	1670	2800	3400	6
	207.9	1450	1320	1190	1190	1190	1120	2800	2420	6
	211.6	1450	1320	1190	1190	1190	1120	2800	2420	6
	255.1	1450	1320	1190	1190	1190	1120	2800	2420	6
	271.7	1450	1320	1190	1190	1190	1120	2800	2420	6
	307.5	1210	1100	1000	1000	1000	970	2800	2000	6
	327.5	1450	1320	1190	1190	1190	1120	2800	2420	6
394.8	1210	1100	1000	1000	1000	970	2800	2000	6	
1134	337.3	1940	1810	1810	1810	1810	1670	2800	3400	4
	365.7	1940	1810	1810	1810	1810	1670	2800	3400	4
	396.4	1940	1810	1810	1810	1810	1670	2800	3400	4
	440.8	1940	1810	1810	1810	1810	1670	2800	3400	4
	477.8	1940	1810	1810	1810	1810	1670	2800	3400	4
	531.3	1940	1810	1810	1810	1810	1670	2800	3400	4
	575.9	1940	1810	1810	1810	1810	1670	2800	3400	4
	624.4	1940	1810	1810	1810	1810	1670	2800	3400	4
	694.2	1940	1810	1810	1810	1810	1670	2800	3400	4
	752.6	1940	1810	1810	1810	1810	1670	2800	3400	4
	836.8	1940	1810	1810	1810	1810	1670	2800	3400	4
	907.1	1940	1810	1810	1810	1810	1670	2800	3400	4
	966.3	1940	1810	1810	1810	1810	1670	2800	3400	4
	1093.4	1940	1810	1810	1810	1810	1670	2800	3400	4
	1185.4	1210	1100	1000	1000	1000	970	2800	2000	4
	1318.1	1250	1096	950	832	800	785	2800	2300	4
	1428.8	1250	1096	950	832	800	785	2800	2300	4
	1690.3	2200	2050	1620	1520	1520	1310	2800	3400	4
	3422.1	1210	1100	1000	1000	1000	970	2800	2000	4



PXA 1130

PXA 113




	i	T ₂ (Nm)						n _{1max} (min ⁻¹)	T _{2max} (Nm)	P _t (kW)
		n ₂ x h								
		10000	25000	50000	100000	500000	1000000			
1132	10.4	1940	1810	1810	1810	1810	1670	2000	3400	8
	12.5	2200	2050	1620	1520	1520	1310	2000	3400	8
	16.4	1450	1320	1190	1190	1190	1120	2000	2420	8
	19.7	1210	1100	1000	1000	1000	970	2000	2000	8
1133	36.9	1940	1810	1810	1810	1810	1670	2000	3400	6
	44.6	1940	1810	1810	1810	1810	1670	2000	3400	6
	53.8	2200	2050	1620	1520	1520	1310	2000	3400	6
	58.4	1940	1810	1810	1810	1810	1670	2000	3400	6
	70.3	2200	2050	1620	1520	1520	1310	2000	3400	6
	84.8	2200	2050	1620	1520	1520	1310	2000	3400	6
	91.9	1450	1320	1190	1190	1190	1120	2000	2420	6
	110.8	1450	1320	1190	1190	1190	1120	2000	2420	6
	133.6	1210	1100	1000	1000	1000	970	2800	2000	6
171.5	1210	1100	1000	1000	1000	970	2800	2000	6	
1134	131.8	1940	1810	1810	1810	1810	1670	2000	3400	4
	158.9	1940	1810	1810	1810	1810	1670	2000	3400	4
	191.5	1940	1810	1810	1810	1810	1670	2000	3400	4
	207.6	1940	1810	1810	1810	1810	1670	2000	3400	4
	230.8	1940	1810	1810	1810	1810	1670	2000	3400	4
	301.7	1940	1810	1810	1810	1810	1670	2000	3400	4
	327.1	2200	2050	1620	1520	1520	1310	2000	3400	4
	363.6	2200	2050	1620	1520	1520	1310	2000	3400	4
	394.2	2200	2050	1620	1520	1520	1310	2000	3400	4
	475.1	2200	2050	1620	1520	1520	1310	2000	3400	4
	515.3	2200	2050	1620	1520	1520	1310	2000	3400	4
	527.7	2200	2050	1620	1520	1520	1310	2000	3400	4
	610.1	2200	2050	1620	1520	1520	1310	2000	3400	4
	735.4	2200	2050	1620	1520	1520	1310	2000	3400	4
	797.2	1210	1100	1000	1000	1000	970	2800	2000	4
	960.9	1450	1320	1190	1190	1190	1120	2800	2420	4
	1158.2	1210	1100	1000	1000	1000	970	2800	2000	4
	1233.7	1210	1100	1000	1000	1000	970	2800	2000	4
	1487.1	1210	1100	1000	1000	1000	970	2800	2000	4


PX / PXA 1130

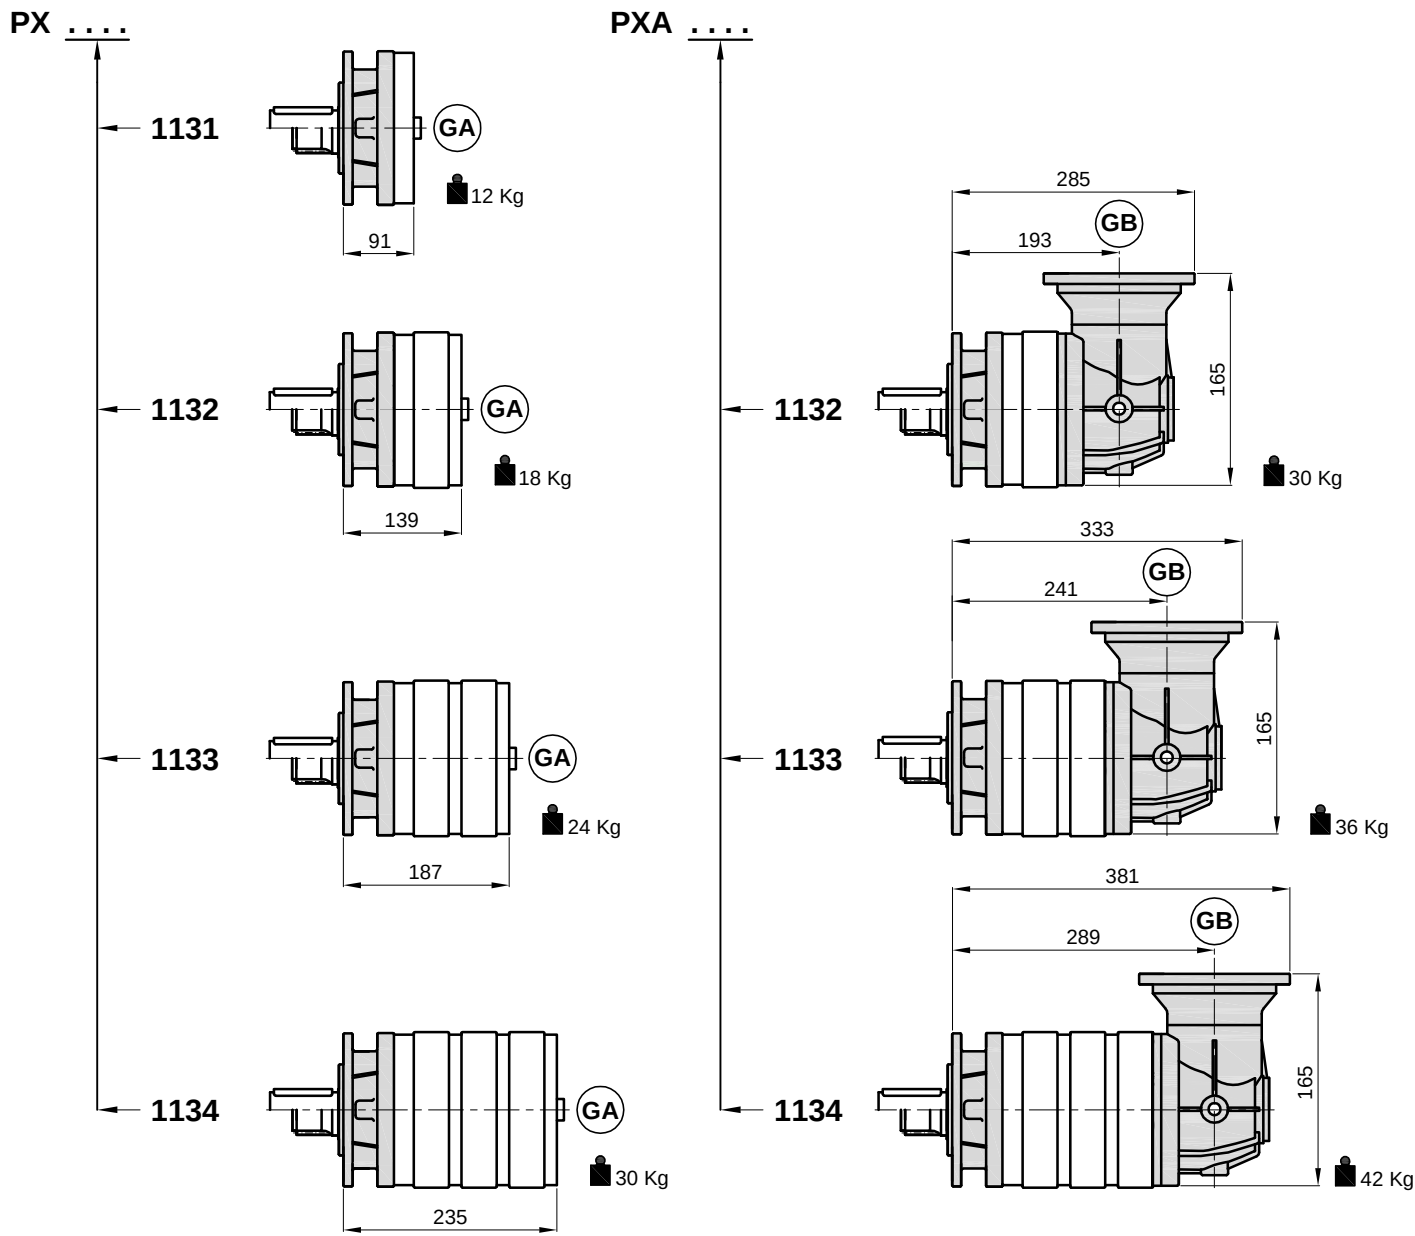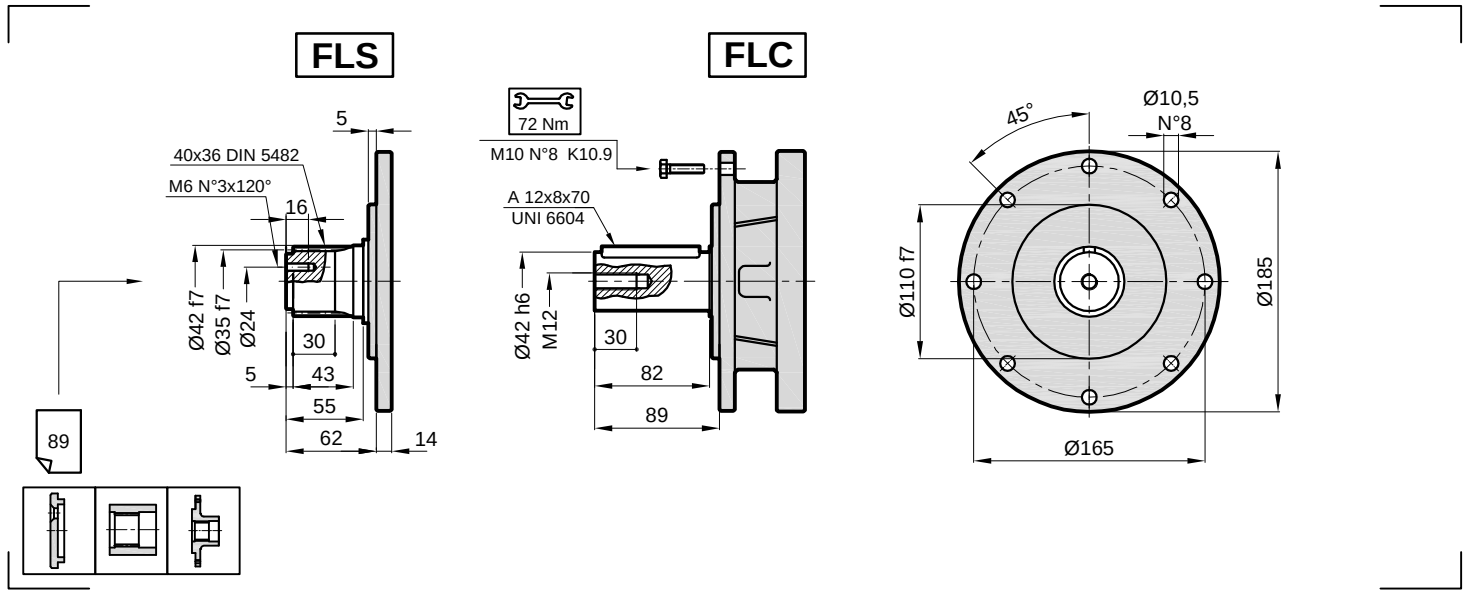


PX / PXA 1130

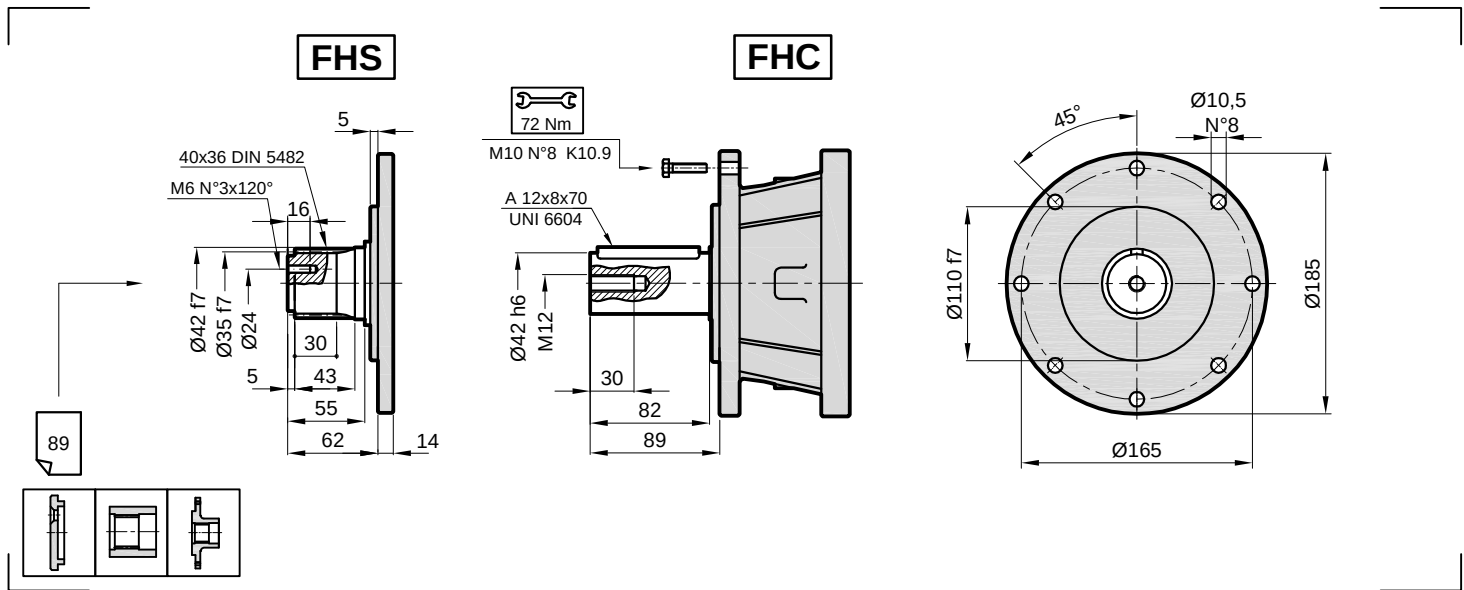



PX

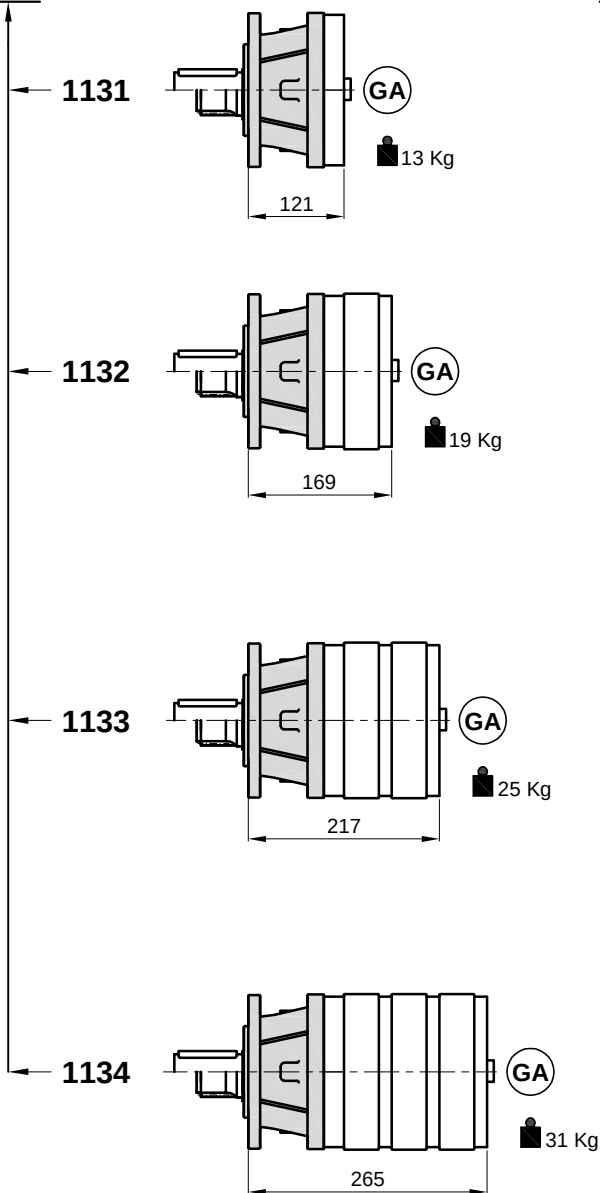

PXA


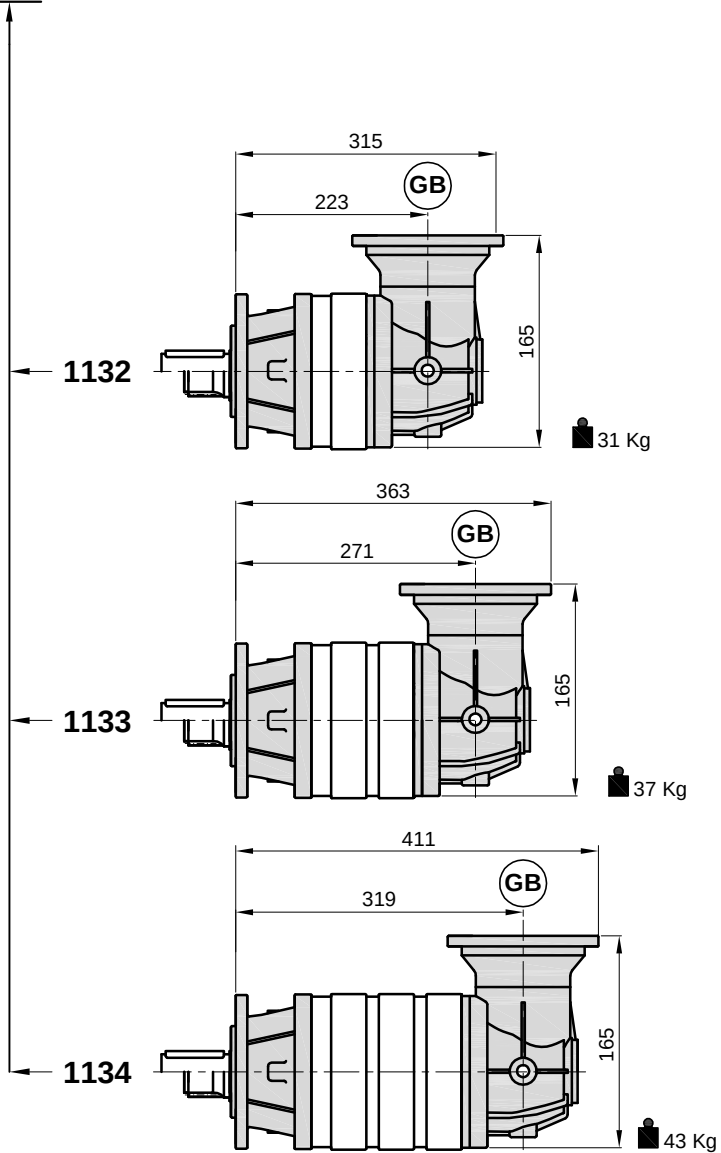


PX / PXA 1130

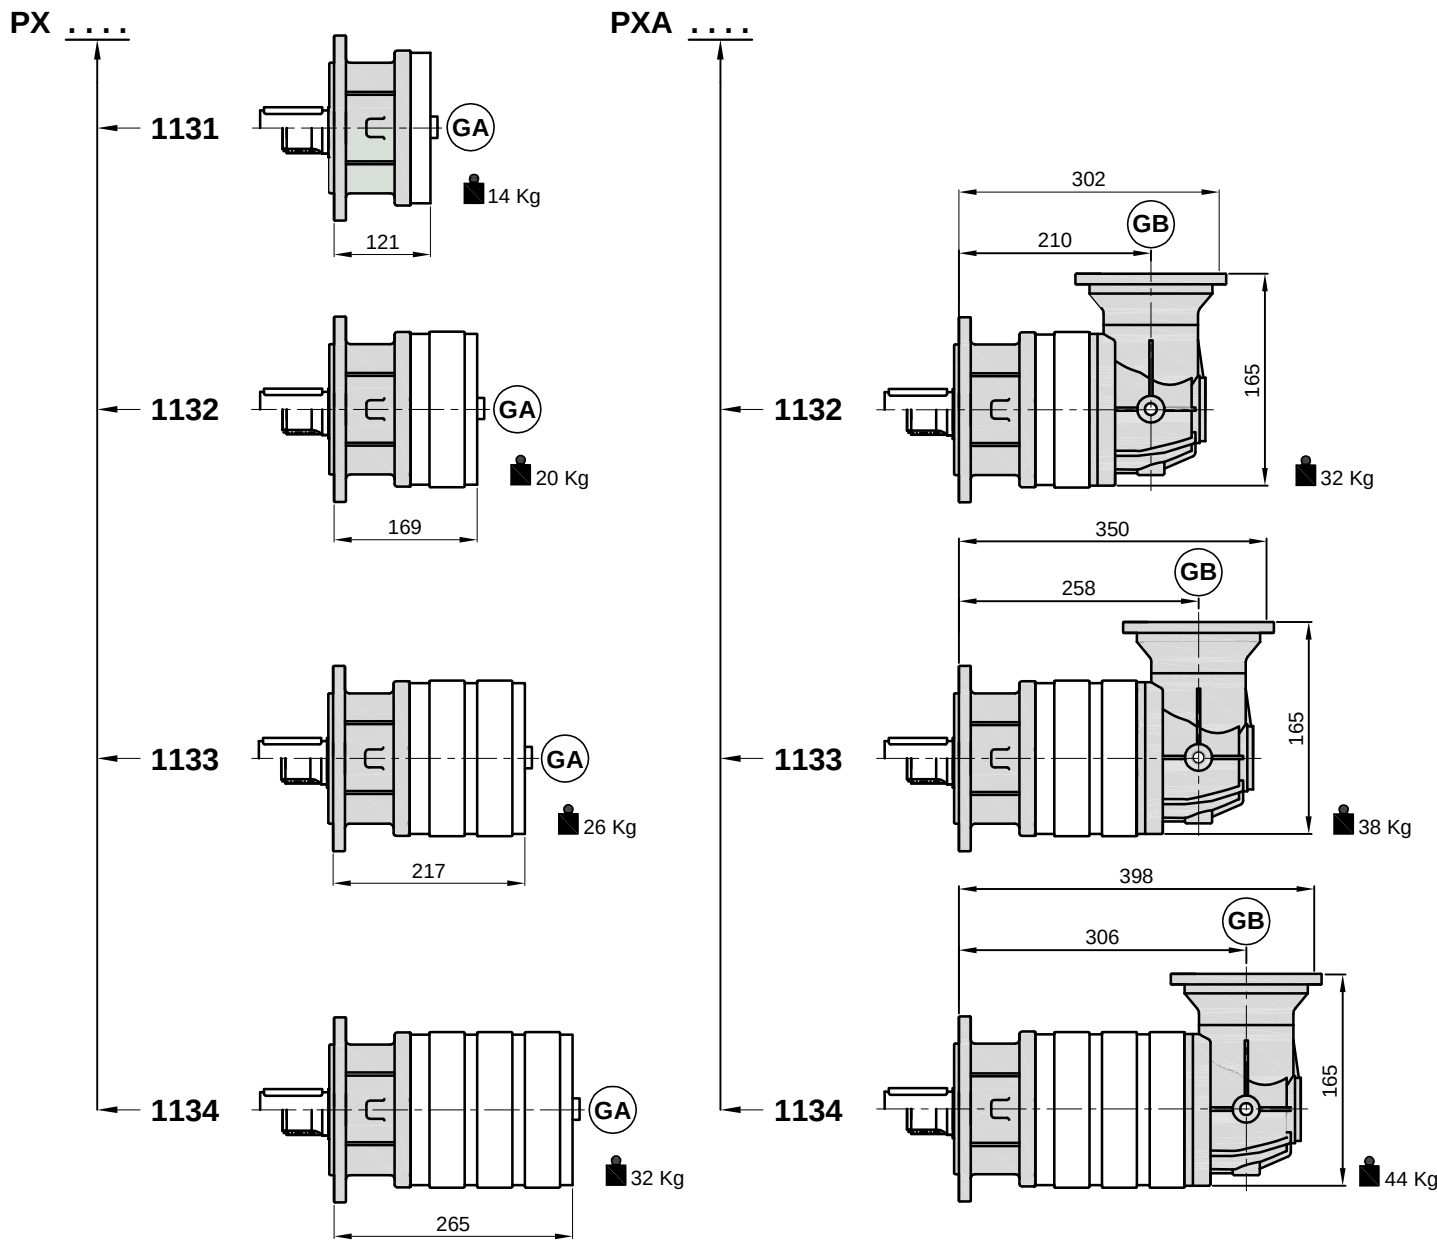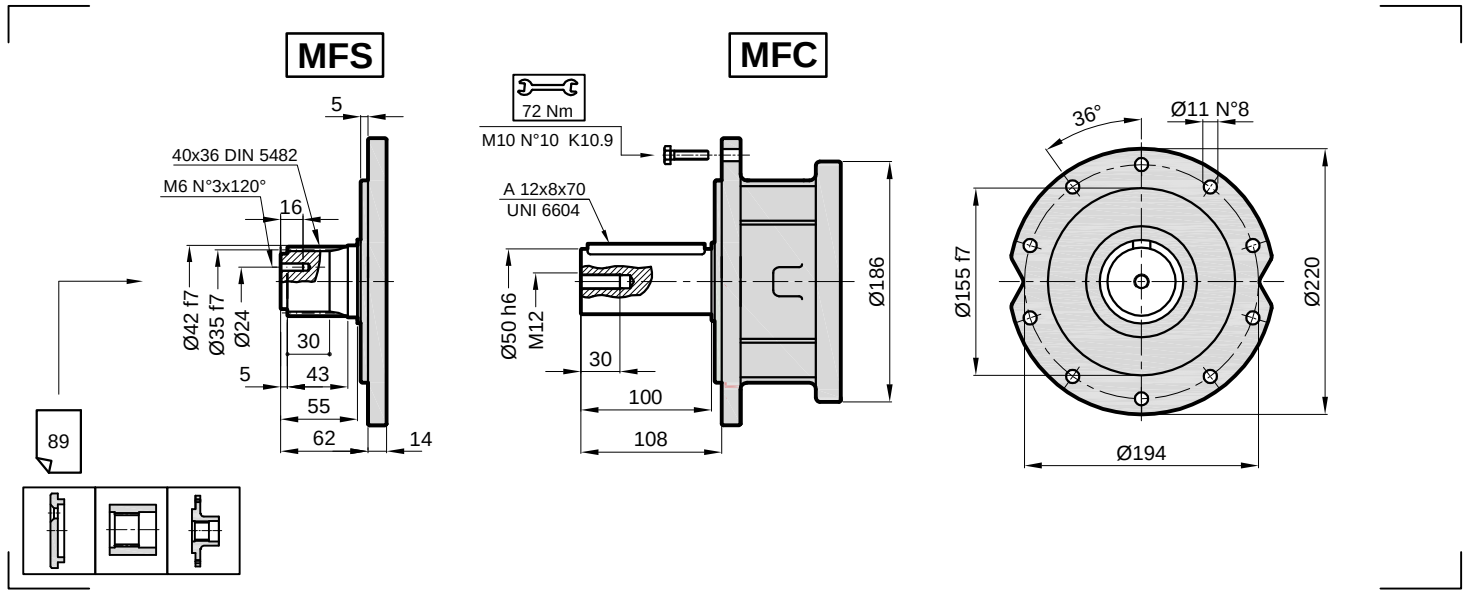


PX / PXA 1130

FSF

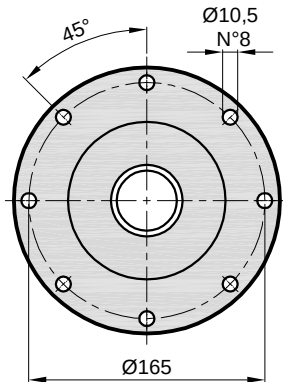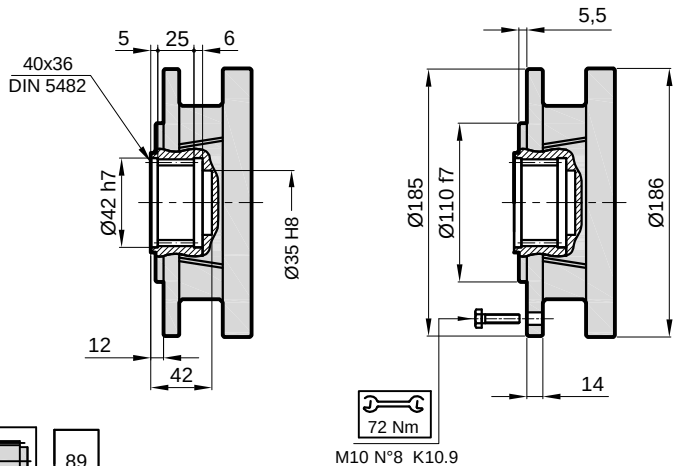


PX


1131




1132



1133




1134




PXA


1132

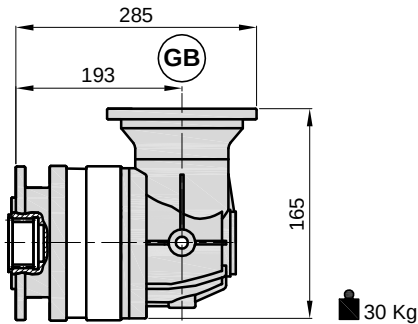


1133

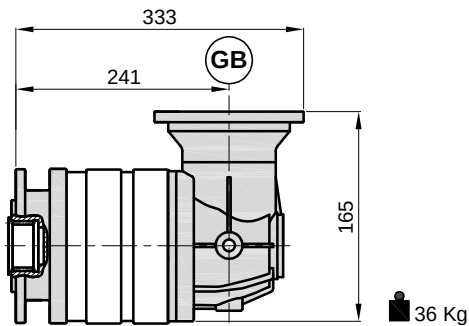


1134

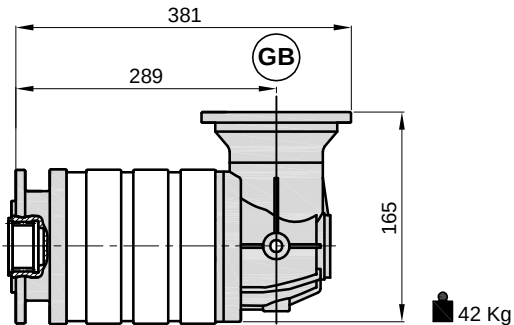


PX / PXA 1130

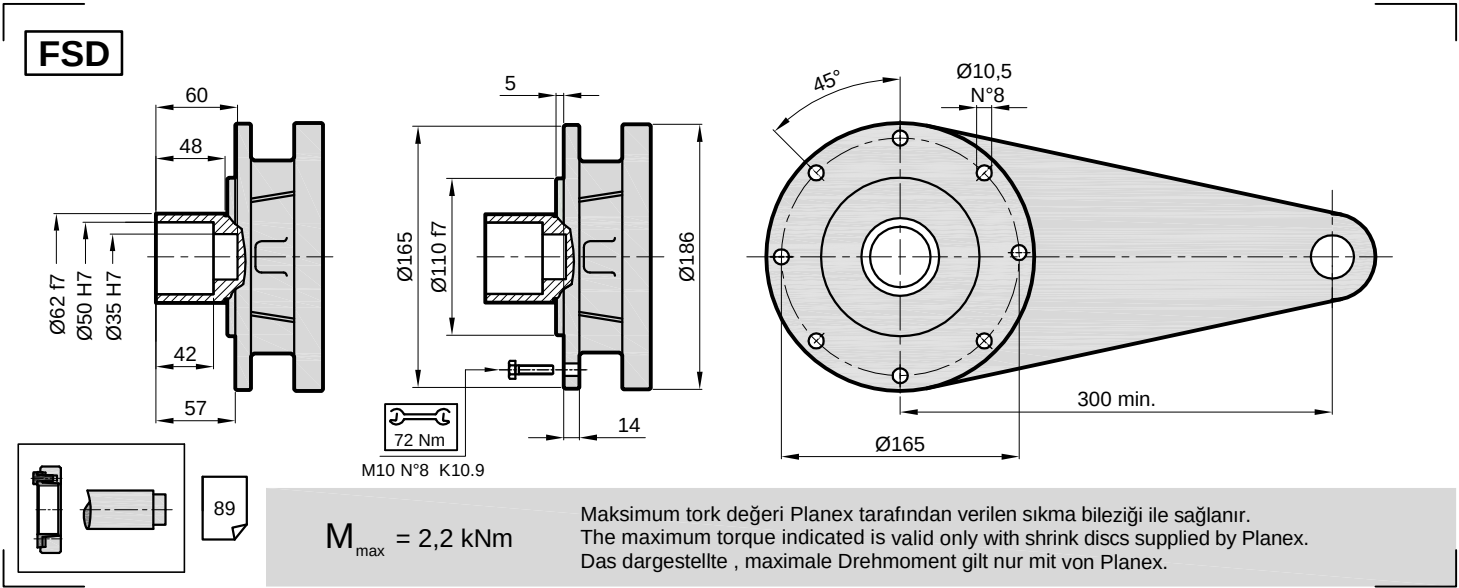

PX

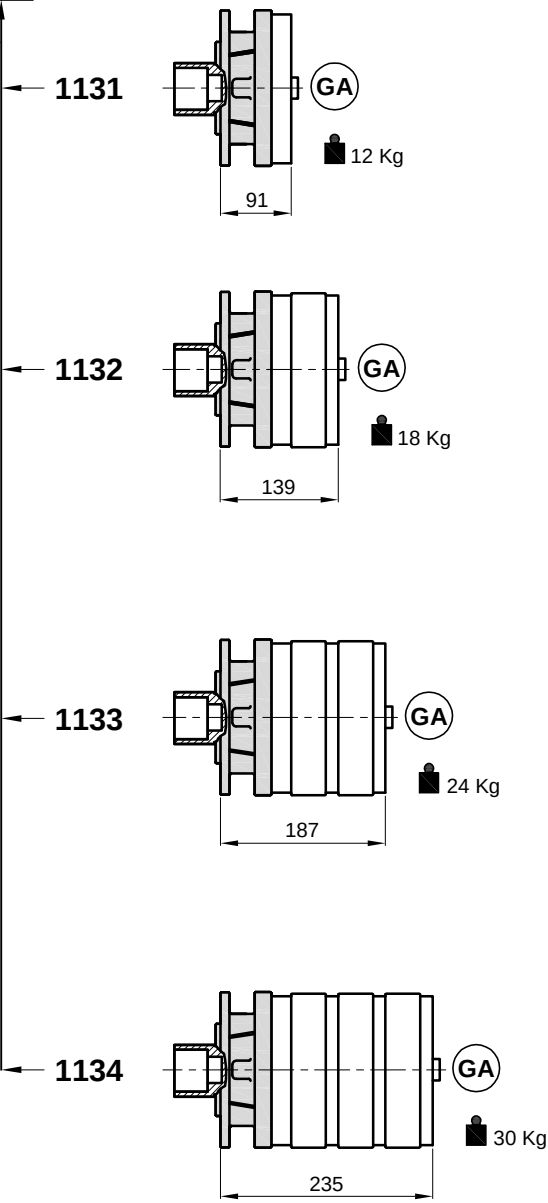


PXA

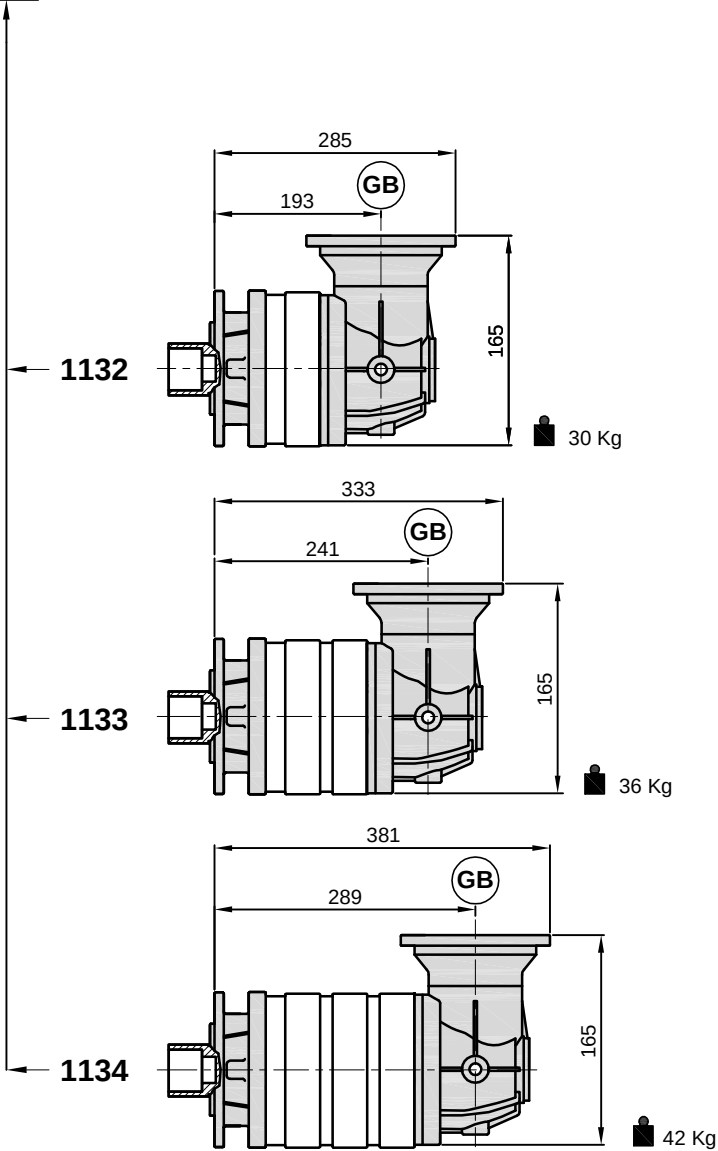


PX / PXA 1130

FDK

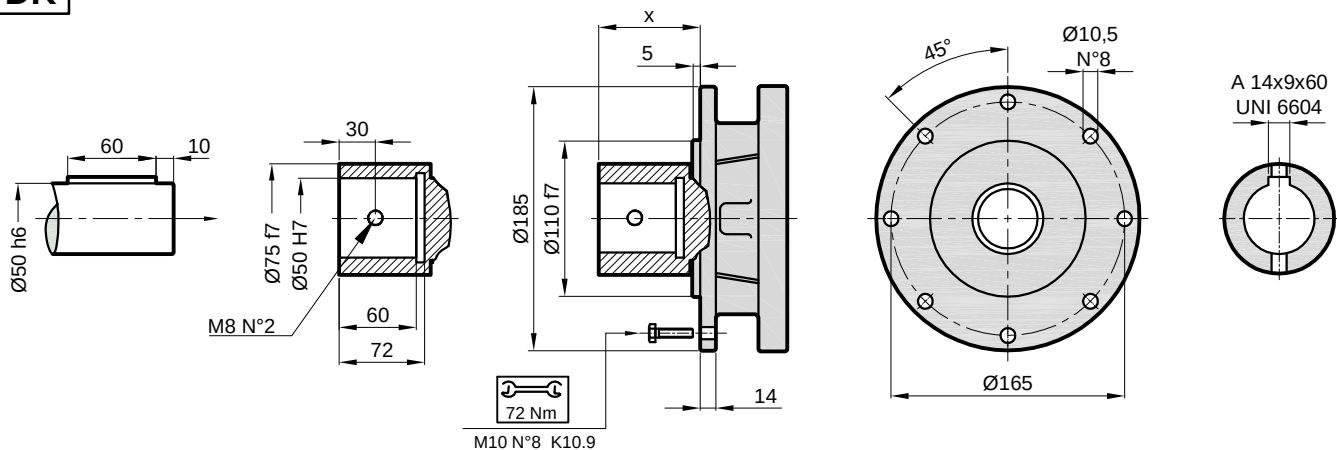


PX


1131




1132



1133

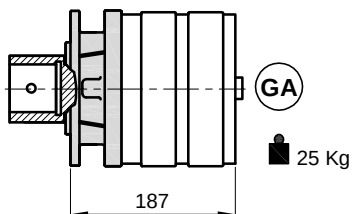


1134

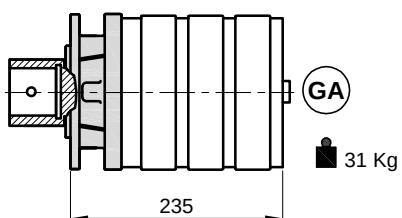


PXA


1132

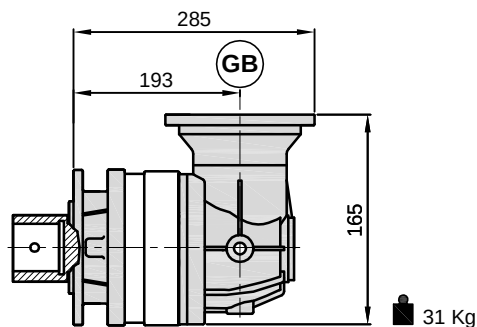


1133

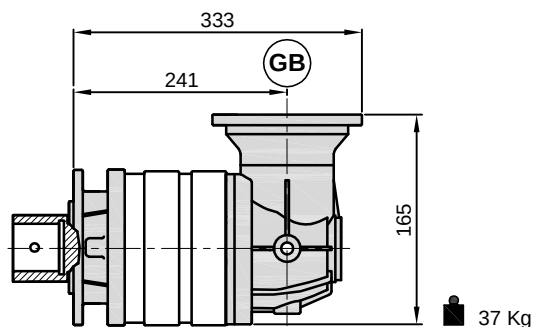

1134

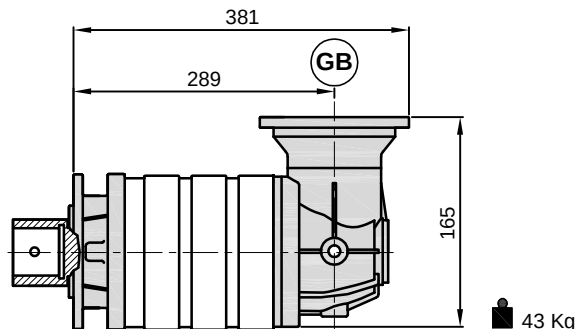


PX / PXA 1130

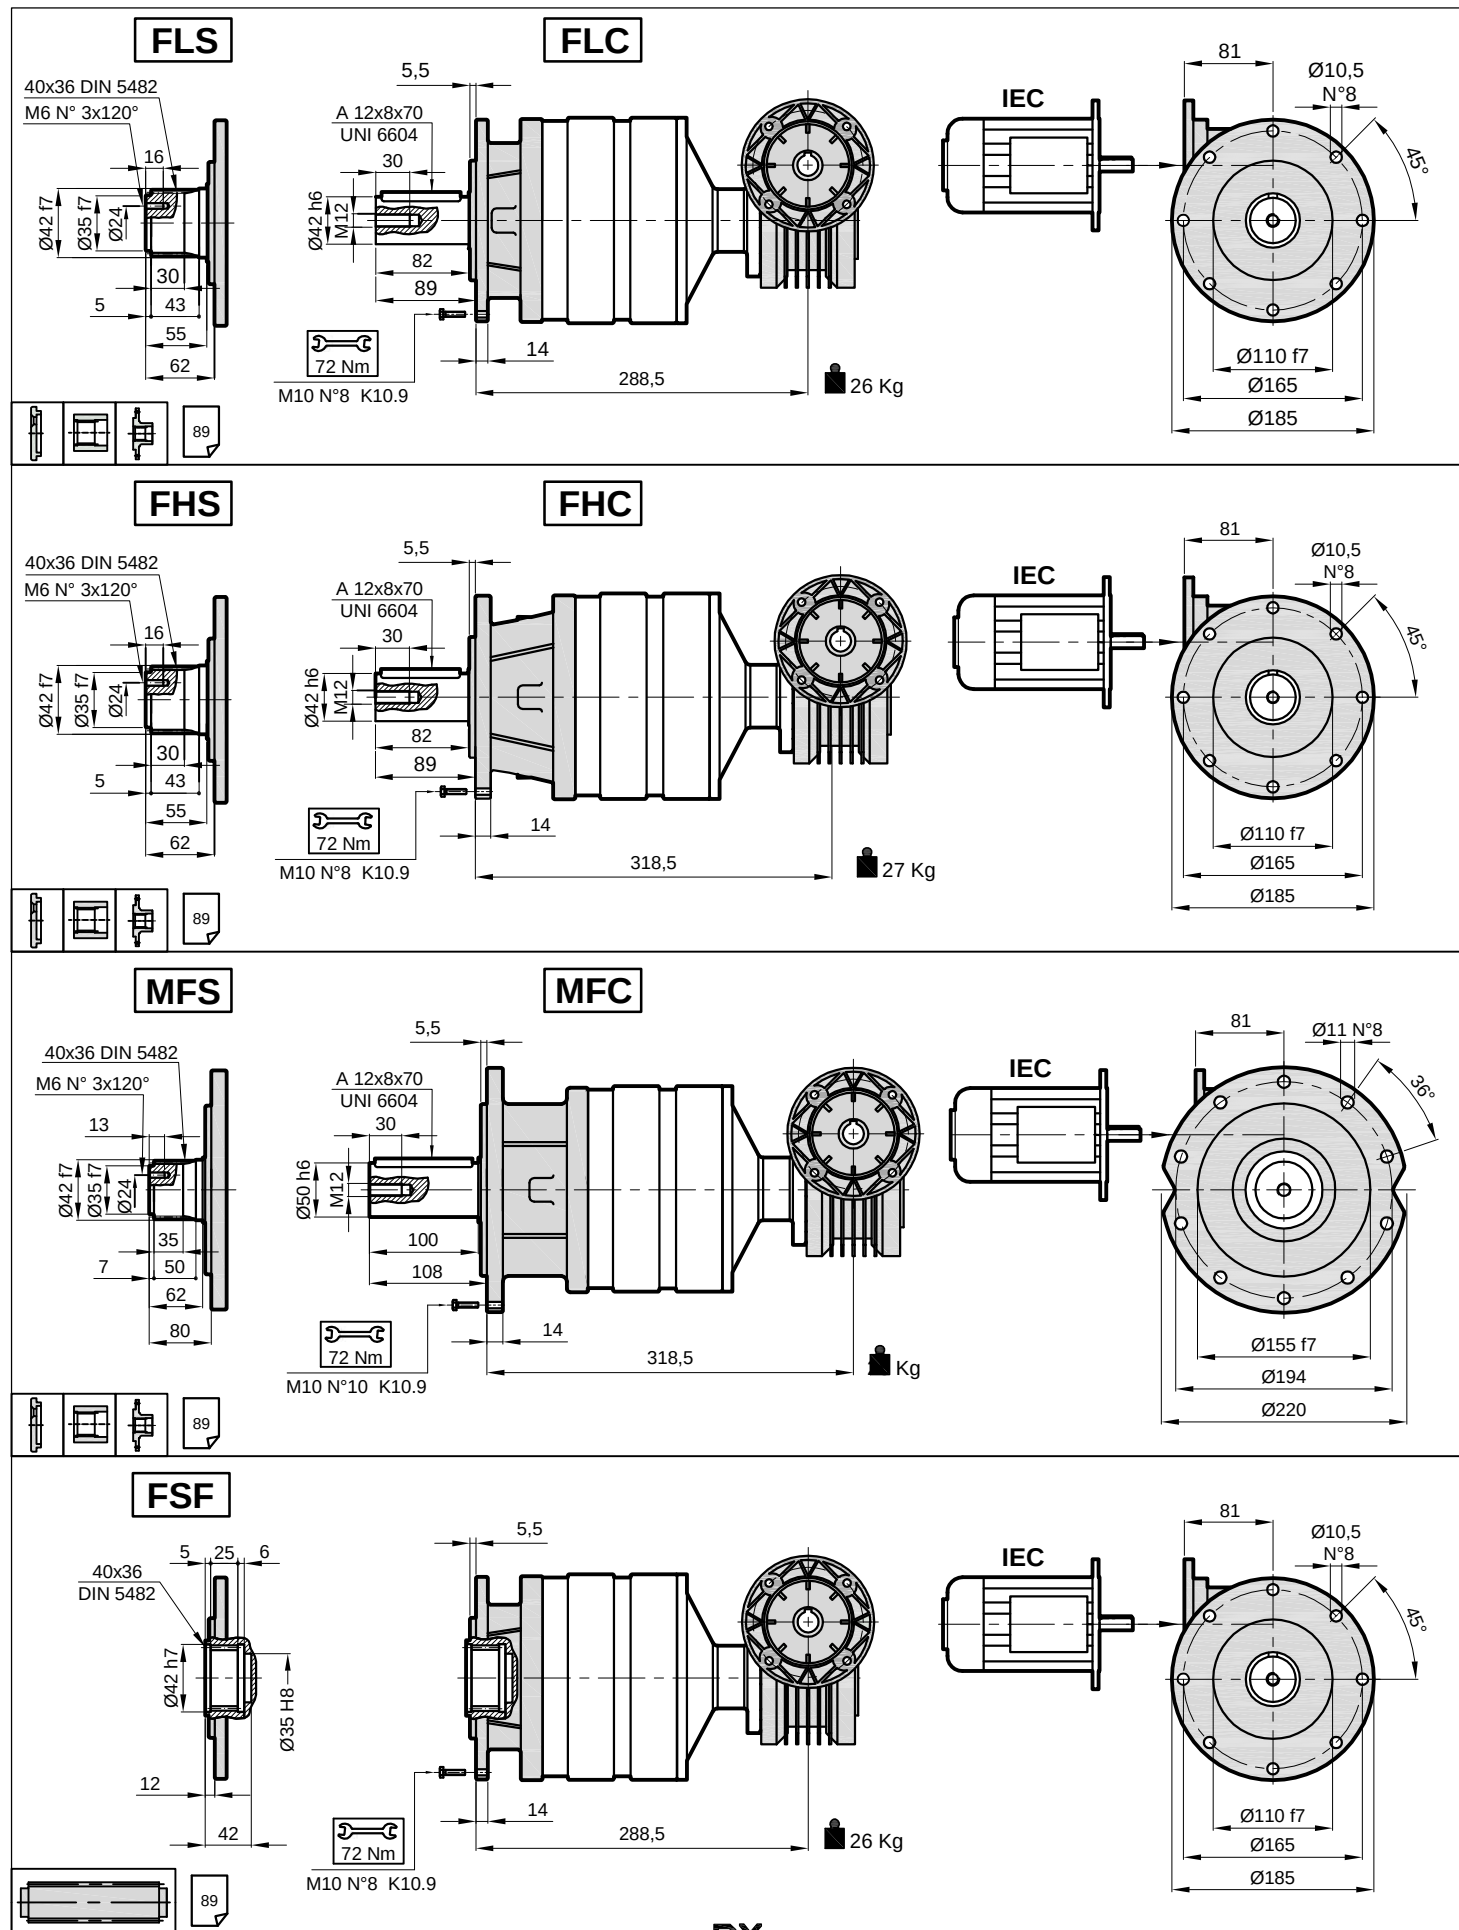


PX / PXA 1130

FSD

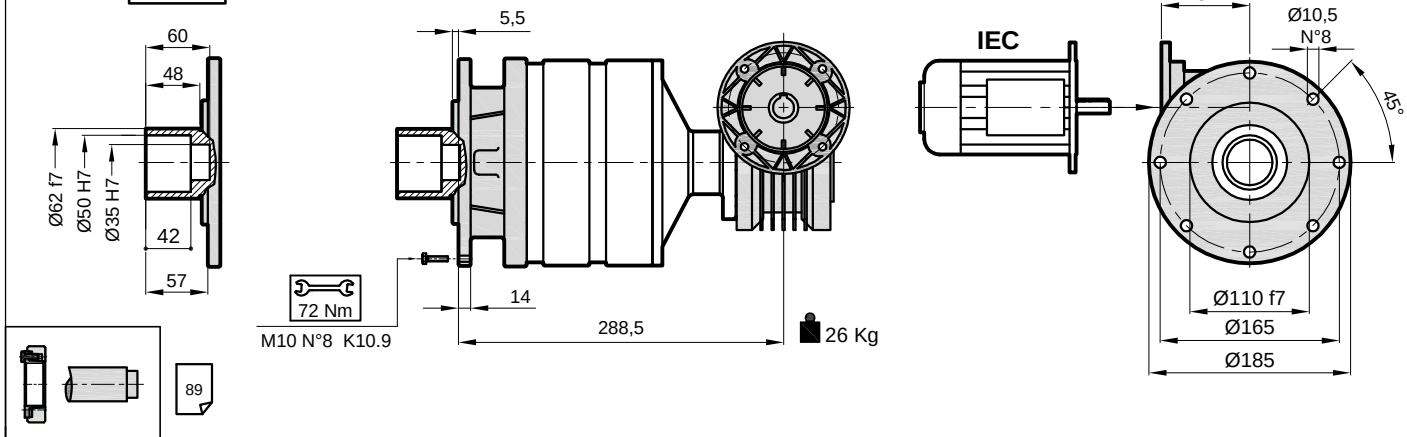


FDK

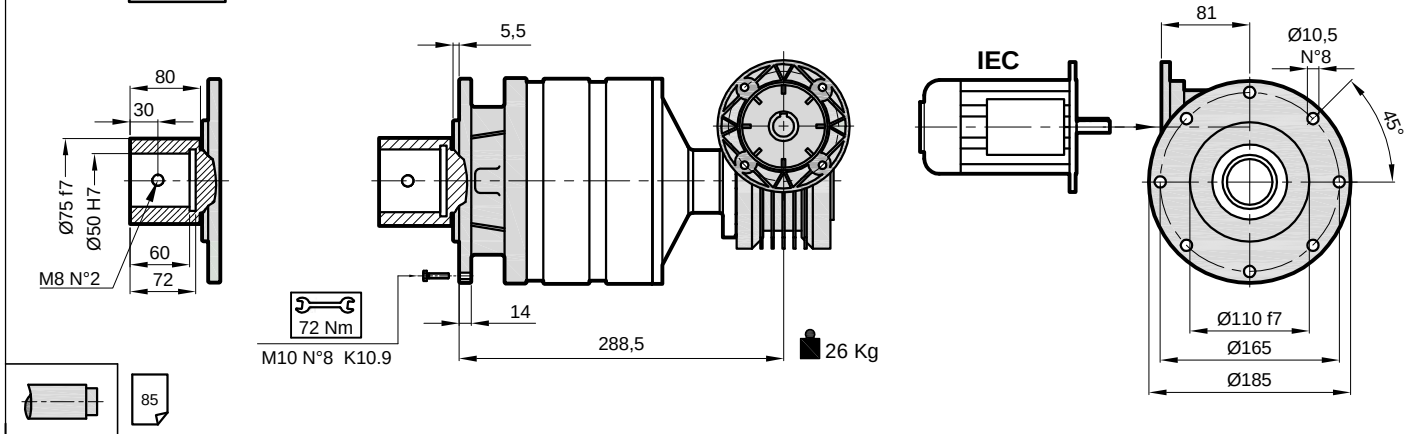

PAS


PAC

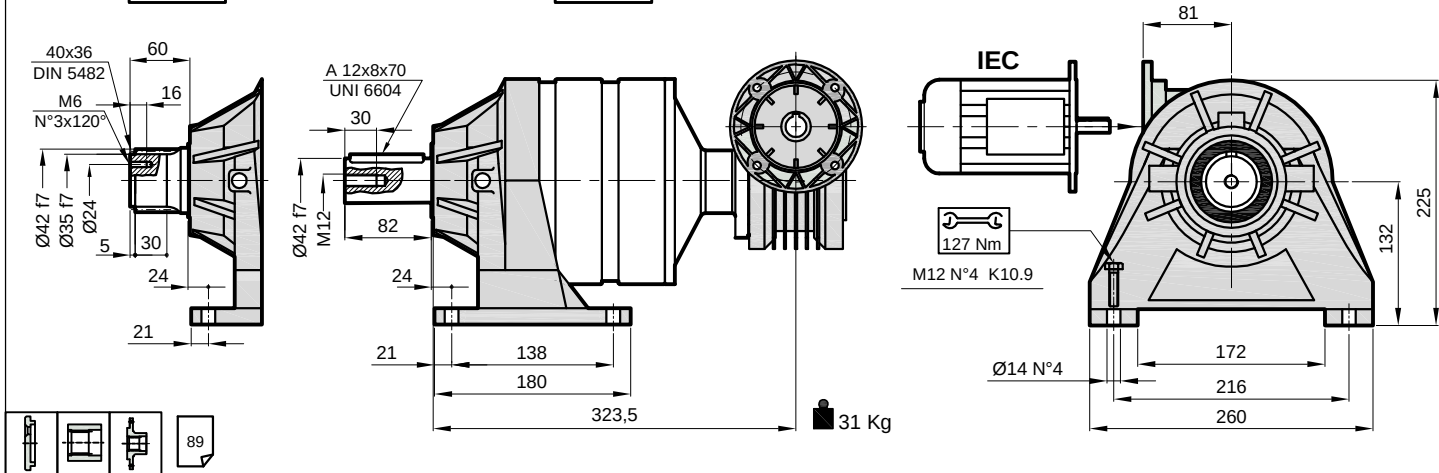


PXW 1133							
	PX 1132	W 50	i_T	n_1 min ⁻¹	T_2 Nm	P Kw	IEC
	12.6 - 58.5	5 - 100	63 - 2850	1400	890 - 2200	0.12 - 0.75	63 - 71 - 80

PX / PXA 1130



ET



MC



TF

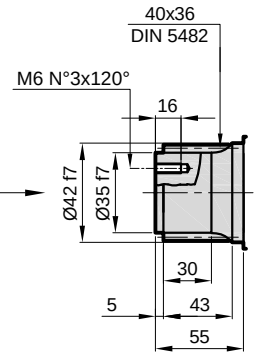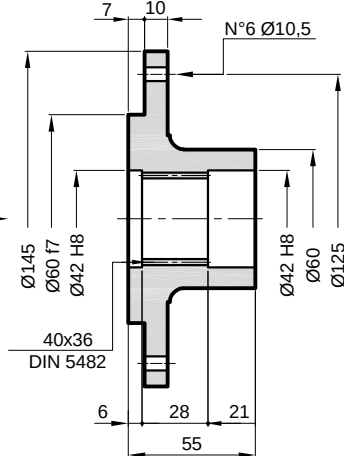

Malzeme / Material / Material
C40

Kod / Code / Bestell
1130.100.001



Malzeme / Material / Material
C40

Kod / Code / Bestell
1130.100.002

Malzeme / Material / Material
C40



Kod / Code / Bestell
1130.100.003

SD




Maksimum tork
Max. torque
Max. Drehmoment
2,2 kNm

Kod / Code / Bestell
1130.100.004

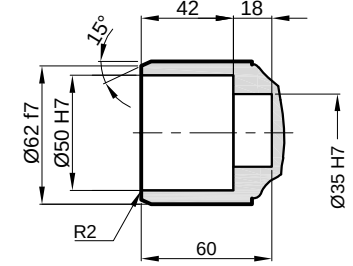


SM

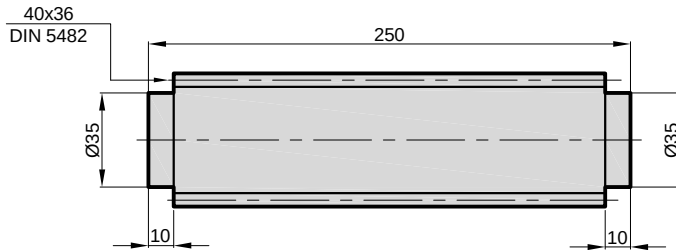


Malzeme / Material / Material
UNI 39NiCrMo3
Sertleştirilmiş ve Temperlenmiş
Hardened and Tempered
Vergütet



Kod / Code / Bestell
1130.100.005



ET




P.

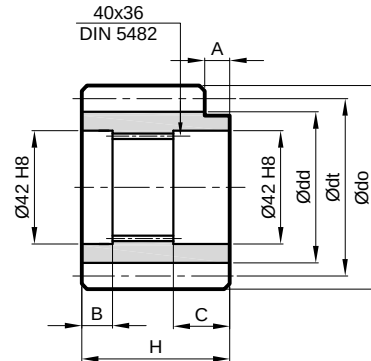

	m	z	x	dt	dd	do	H	A	B	C	Kod / Code / Bestell
P1	4.5	14	0.507	63	56	75.5	55	0	6	21	1130.100.106
P2	5	14	0.500	70	62.5	84.8	65	0	16	21	1130.100.107
P3	6	12	0.250	72	61	84.8	59	14	10	21	1130.100.108
P3	6	14	0.500	84	73	99.6	65	0	16	21	1130.100.109

UNI 39NiCrMo3
Sertleştirilmiş ve Temperlenmiş
Hardened and Tempered
Vergütet

PX / PXA 1130

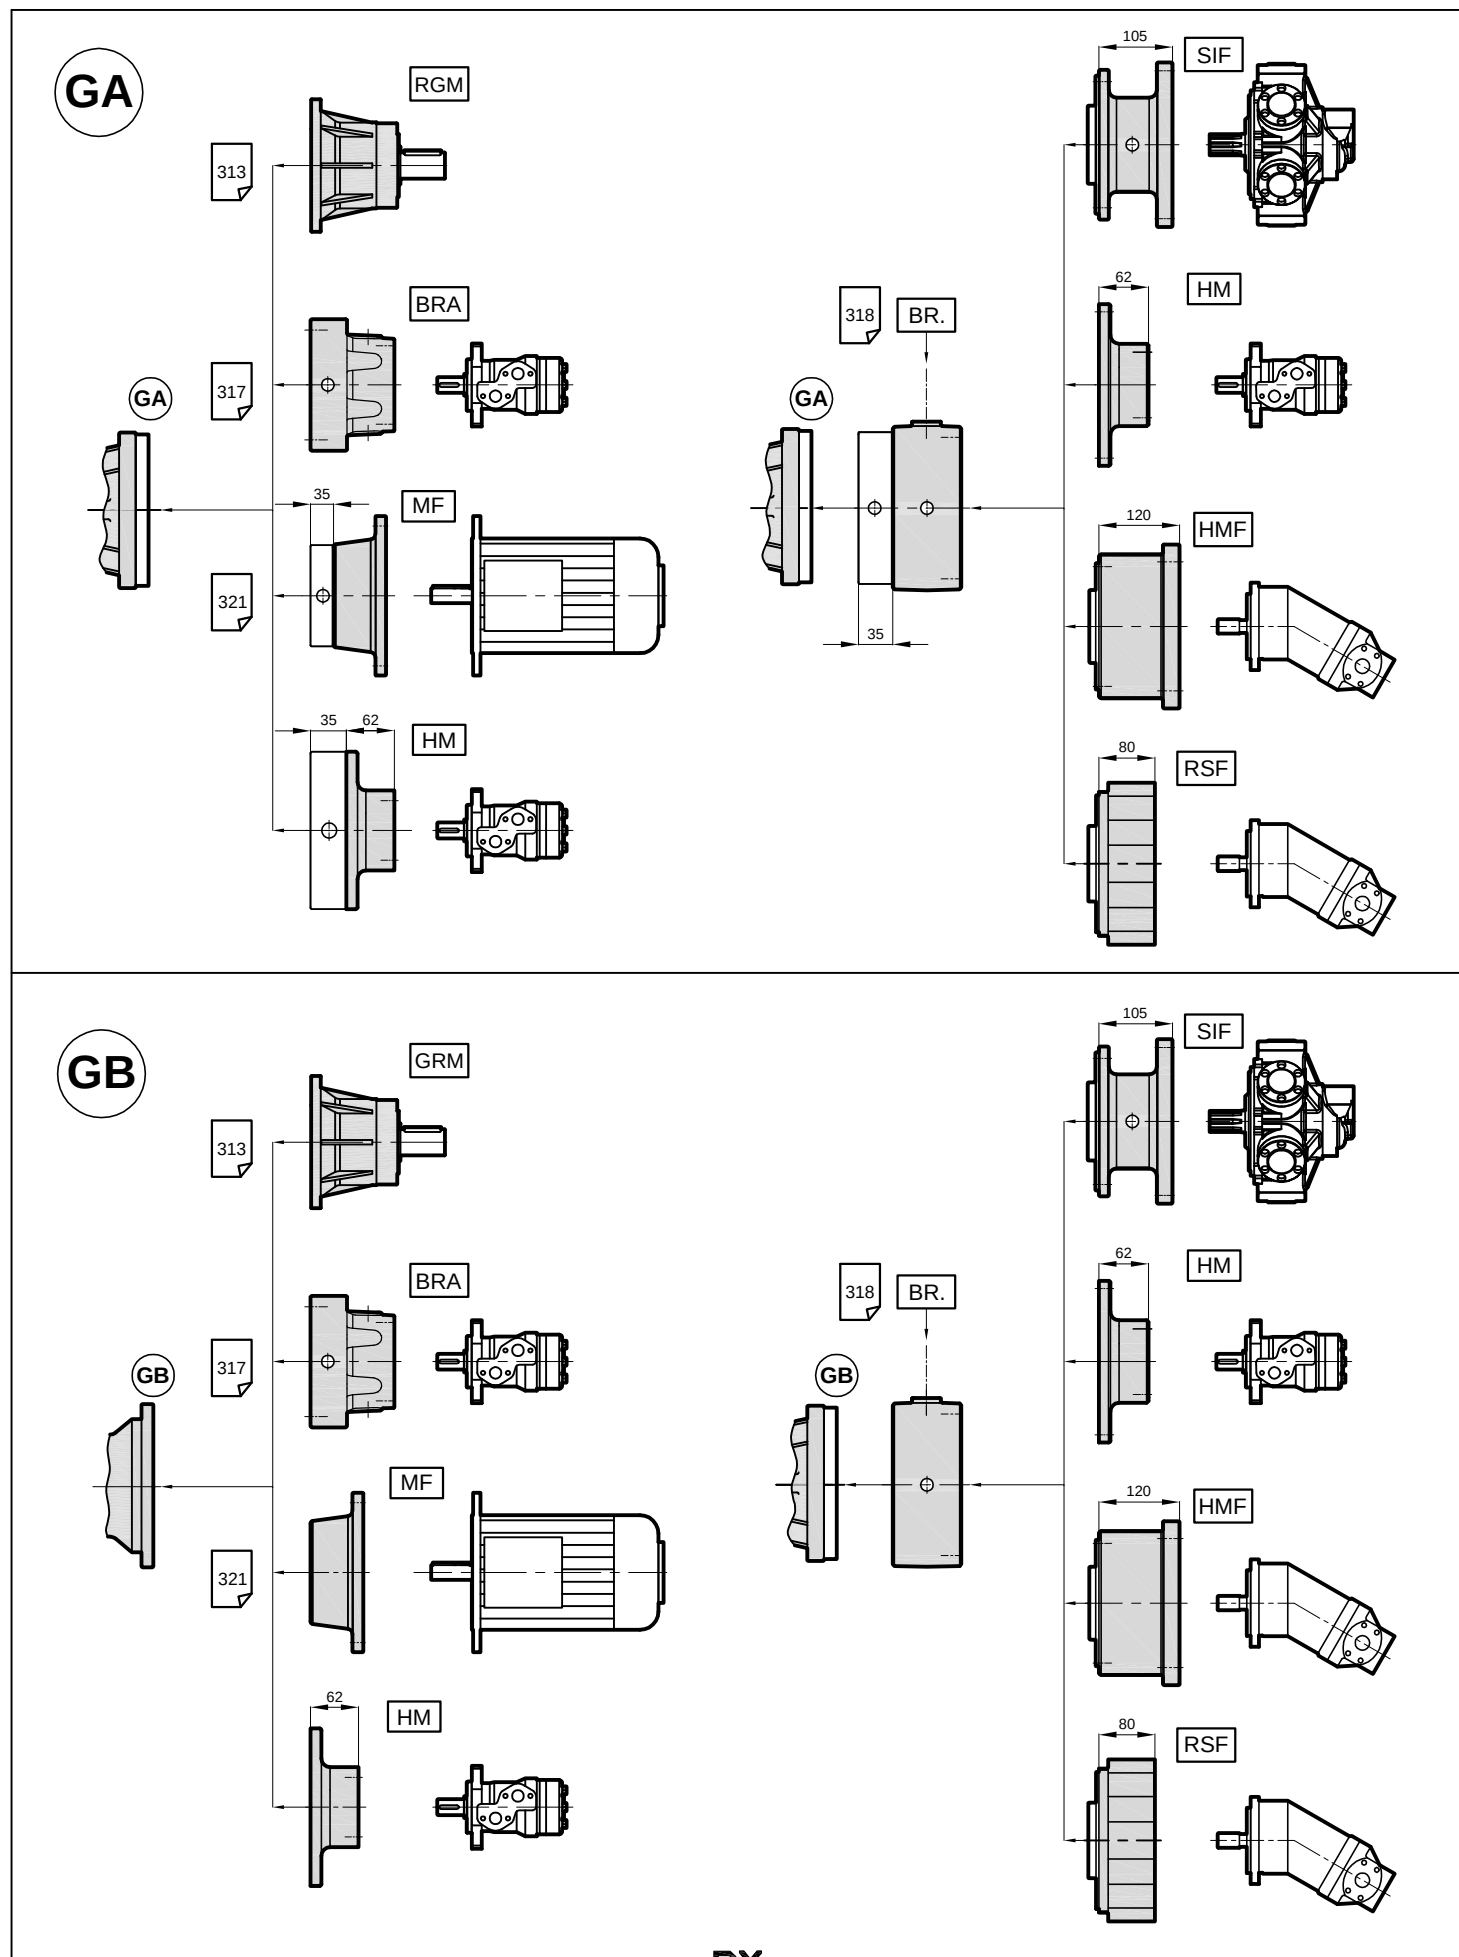

PX / PXA 1130

Radyal Yük (F_{rp})

Aşağıdaki diyagramlar radyal yükleri ve K faktörlerini arzu edilen $n_2 \times h$ değerlerinde verir.

Radial Loads (F_{rp})



The following curves show the radial loads and the K factors to obtain the required $n_2 \times h$ value.

Radiallast (F_{rp})

In den nachstehenden Diagrammen ist die Radiallast und der Koeffizient K dargestellt und kann mit dem gewünschten Wert $n_2 \times h$ verglichen werden.



FL - FH - PA

F_{rp} (N)

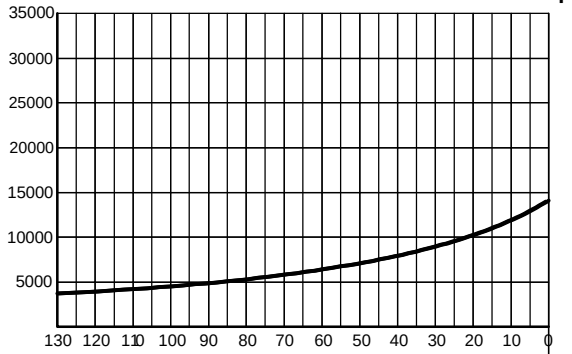

FLS
FLC


F_{rp} (N)

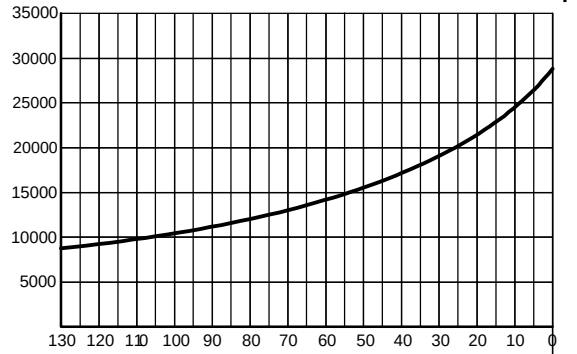

FHS
FHC

PAS
PAC

K

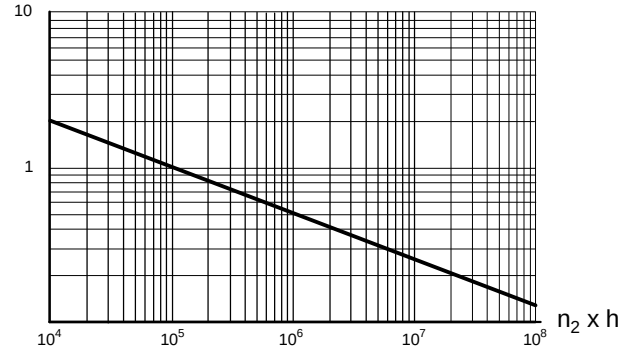

	$n_2 \times h$			
	10^5	10^4	10^6	10^7
FL - FH	F_{rp}	$F_{rp} \cdot K$		
PA	$F_{rp} \cdot 0,75$	$F_{rp} \cdot K \cdot 0,75$		

Aksiyel Yük (F_a)

Tablodaki aksiyel yük değerleri çıkış tipi ve tatbik edilen yük yönünde verilmiştir.


Axial Loads (F_a)

The values of the axial loads in the table refer to the output versions and load directions of application.


Axiallast (F_a)

Die dargestellten Werte der Axiallast basieren auf der Version und der applizierten Lastrichtung.


F_a (N)	FL	FH - PA	
	32000	32000	←
	32000	48000	→



FLS
FLC



FHS
FHC



PAS
PAC